

## Appendix 1



Department of Pesticide Regulation  
Environmental Monitoring Branch  
Surface Water Protection Program  
1001 I Street  
Sacramento, California 95812

### **Modeling to determine the maximum allowable leach rate for copper-based antifouling products in California marinas**

Xuyang Zhang and Nan Singhasemanon

January 31, 2014

#### **Abstract**

DPR is required by law to determine a copper leach rate for antifouling paint pesticides for the protection of aquatic environments. Five scenarios representing various levels of copper loading were defined. For each scenario, a leach rate was calculated by the MAM-PEC model that limits dissolved copper concentrations in the marina to below the California saltwater chronic water quality standard of 3.1 µg/L. Copper leach rates were calculated for 5 different marina scenarios based on hull cleaning techniques and frequency of cleaning events. The maximum allowable leach rate ranged from 0.46 to 24.6 µg/cm<sup>2</sup>/day depending on the scenario, cleaning frequency, and cleaning methods. About 5–100% of current registered products have leach rates that are higher than the derived leach rates. Leach rates calculated for the BMP and non-BMP decreased from those determined for no cleaning. When the cleaning frequency was decreased to monthly, leach rates were increased by 25% for BMP scenarios and 9% for the non-BMP scenarios. Converting to non-copper alternatives can also reduce copper loading and consequently affect the selection of maximum allowable leach rates. This analysis will serve as a basis for decision making on scenario selection and final leach rate determination.

#### **Introduction**

Copper has been found in California marinas at concentrations exceeding water quality criteria (Singhasemanon *et al.*, 2009). Copper-based antifouling paint (AFP) pesticides are commonly applied on the underwater portion of a vessel as a biocide to protect boats from fouling. These copper AFPs have been identified as the primary source of copper pollution in marinas, particularly in salt and brackish water marinas along the California coast. In 2010, the Department of Pesticide Regulation (DPR) initiated the re-evaluation of 212 copper-based AFP products. In October 2013, assembly bill AB 425 was passed. This bill requires DPR to determine a leach rate for copper AFPs used on recreational vessels and to make recommendations for appropriate mitigation measures that may be implemented to protect aquatic environments from the effects of exposure to these paints. The objective of this analysis is to determine the maximum allowable leach rates for AFPs that would limit copper concentrations to the levels that are within compliance of current California Toxics Rule (CTR) water quality standards.

## Materials and Methods

### The MAM-PEC model

The Marine Antifoulant Model to Predict Environmental Concentrations (MAM-PEC) is a hydrodynamic model designed to predict dissolved and total concentrations of antifouling compounds within marine environments. The model takes into account emission factors (e.g., leaching rates, shipping intensities, residence times, vessel hull underwater surface areas), compound-related properties and processes (e.g.,  $K_d$ ,  $K_{ow}$ ,  $K_{oc}$ , volatilization, speciation, hydrolysis, photolysis, bacterial degradation), and properties and processes related to the specific environment (e.g., currents, tides, salinity, DOC, suspended matter load) (van Hattum *et al.*, 2002).

MAM-PEC was developed in the Netherlands in 1999 and has been widely used worldwide including the European countries, New Zealand, and the United States. Recently, the model was used by U.S. EPA in their reregistration for copper products. The MAM-PEC was selected for this study due to its wide-acceptance, adaptability, and its capability of providing predicted environmental concentrations (PECs) for generic marine environments including marinas.

The MAM-PEC model is normally used to predict copper concentrations (PEC) in a marina based on input parameters including the leach rate for a copper AFP. For this study, however, DPR used the saltwater copper CTR criterion (3.1  $\mu\text{g/L}$ ) as target output to back-calculate the leach rate needed to achieve the desired dissolved copper concentration in a marina. The reverse approach included the following steps: (1) run the model with an initial estimate of the leach rate value; (2) compare the model generated average PEC value for DCu to the target concentration value of 3.1  $\mu\text{g/L}$ ; (3) adjust the leach rate according to the difference between the average PEC and the target value and re-run the model; and (4) repeat step 1 to 3 until the PEC for DCu equals the target value.

### Definition of marina scenarios

MAM-PEC can simulate various marine environments including marinas, harbors and shipping lanes. In addition to the EU standard scenarios, the model also allows users to define their customized environments. In California, monitoring studies have shown that high copper concentrations were found mainly in salt and brackish water marinas (Singhasemanon *et al.*, 2009). Therefore, this study defines the copper AFP use scenarios for California marinas and uses the option of user-defined marina in the MAM-PEC environmental setting.

To define the marina scenarios, a dataset containing physical dimension and environmental chemistry information from 20 California marinas was used (sample dataset). International Paint, Inc. developed this dataset and included it in their mitigation proposal to DPR (International Paint, 2010). It contains measurements for 15 variables including total number of vessels, marina length, width, surface area, outlet width, fraction of total vessels in the marina painted with copper, tidal period, mean tidal range, water depth, median total suspended solids (TSS), median DOC, background DCu concentration, pH, salinity, and temperature (Appendix I). The physical dimension such as marina length, width, and outlet width data were obtained from Google Maps satellite imaging. Water depth was determined by taking the depth from the website of the marina or data from local National Oceanic and Atmospheric Administration (NOAA) stations,

Singhasemanon *et al.*, (2009) or San Diego Regional Water Board (2005). The physicochemical data such as TSS, pH, and temperature were taken from the nearest NOAA stations. The full list of data is attached in Appendix I.

Five California marina scenarios were defined reflecting various levels of copper loading with scenario 1 having a lower level of copper loading and scenario 5 having a higher level of copper loading (Table 1 and 2). The five scenarios were differentiated by assigning different values to the nine key parameters that reflect the total number of vessels, physical dimension and physicochemical properties of marinas (Table 1 and 2). The percentile values for each of the 9 parameters from the sampled dataset were used. For example, for the total number of vessels, 50<sup>th</sup>, 75<sup>th</sup>, 90<sup>th</sup>, 95<sup>th</sup> percentile and the maximum values were used for scenario 1, 2, 3, 4, and 5, respectively (Table 1). However, while some variables are positively correlated with the PEC of DCu some others are negatively correlated. Therefore, for the variables that are positively correlated with the PEC (e.g., number of vessels, background concentration of DCu) values at 50<sup>th</sup>, 75<sup>th</sup>, 90<sup>th</sup>, 95<sup>th</sup> percentile and the maximum values were used for scenario 1, 2, 3, 4, and 5, respectively. For variables that are negatively correlated with PEC (e.g., TSS, tidal range, water depth, outlet width), values at 50<sup>th</sup>, 25<sup>th</sup>, 10<sup>th</sup>, 5<sup>th</sup> percentile and the minimum values were used instead. This approach ensures that the copper loading levels incrementally increase from scenario 1 to 5.

There is one complication with the above approach. Some variables are strongly correlated with each other but have the opposite impact on DCu PECs. For example, the total number of vessels is strongly correlated with surface area of marinas (product of marina width and length) (Fig 1). While the number of vessels is positively correlated with DCu PECs, marina width is negatively correlated with DCu PECs. In this case, percentile values for the number of vessels and marina width were used directly as model input. Then, the surface area and marina length were calculated based on the number of vessels using equations (1) and (2). Equation 1 is the regression equation from Figure 1. For marina width, the maximum value, and the values at 95<sup>th</sup>, 90<sup>th</sup>, 75<sup>th</sup> and 50<sup>th</sup> percentiles were used for scenario 1, 2, 3, 4, and 5, respectively. The values for the total number of vessels and the physical dimensions of marinas are shown in Table 1. The values for the physicochemical properties for each of the scenarios are shown in Table 2.

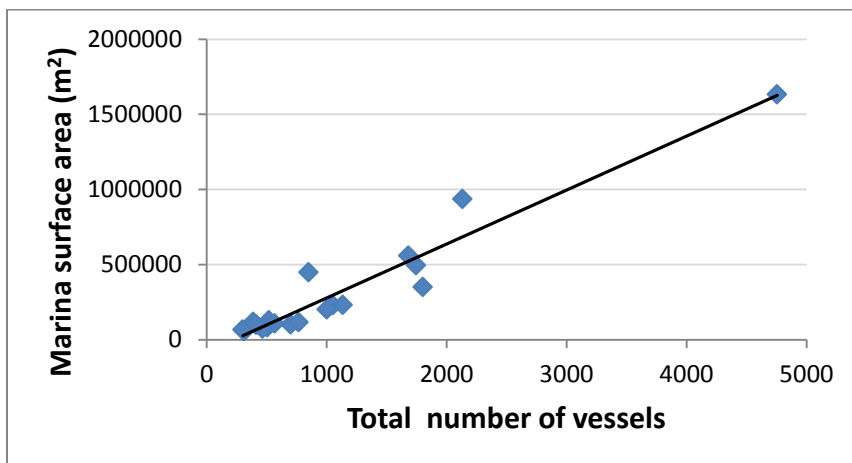


Fig 1: Regression between total number of vessels and marina surface area;  $P < 0.0001$ ,  $R^2 = 0.93$

$$\text{Marina Surface Area} = 359 \times \text{Total Vessels} - 80073 \quad \text{Equation (1)}$$

$$\text{Marina Length} = \text{Surface Area} \div \text{Marina Width} \quad \text{Equation (2)}$$

The rest of the variables were not listed on tables 1 and 2 because they do not vary significantly among the 20 marinas or the variables are not critical for producing the DCu PEC. These variables are tidal period, copper application rate, pH, DOC, and salinity. The mean values of these variables were used as model input and were identically set for all the 5 scenarios.

Table 1: Physical dimensions and number of vessels defined in the five scenarios

Marina Scenarios	Copper loading	Number of vessels		Outlet width X3 (m)		Marina width Y1 (m)		Surface Area (m <sup>2</sup> )	Marina length X2 (m)
		Value	Percentile	Value	Percentile	Value	Percentile		
1	Low	733	50%	95	50%	1,600	100%	182,895	114
2		1270	75%	63	25%	1,594	95%	375,857	236
3		1833	90%	49	10%	1,543	90%	578,046	375
4		2263	95%	43	5%	751	75%	732,344	975
5	high	4754	100%	40	0%	473	50%	1,626,613	3443

Table 2: Physiochemical properties for marinas in the five scenarios

Marina Scenarios	Copper loading	Tidal range (m)		Water depth (m)		TSS (mg/L)		Background concentration of DCu (µg/L)	
		Value	Percentile	Value	Percentile	Value	Percentile	Value	Percentile
1	Low	1.24	50%	3.66	50%	18.20	50%	0.70	50%
2		1.16	25%	2.44	25%	17.10	25%	1.23	75%
3		1.11	10%	2.12	10%	14.52	10%	1.61	90%
4		1.08	5%	2.03	5%	13.66	5%	1.70	95%
5	high	1.08	0%	2.03	0%	13.00	0%	1.70	100%

### Estimation of underwater area of vessels

The underwater area of vessels is a very important parameter in MAM-PEC because copper emission is calculated based on the underwater area and leach rate. The study used the following equation to estimate underwater area of vessels:

$$\text{UnderWaterArea} = \text{length} \times \text{beam} \times 0.85 \quad \text{Equation (3)}$$

This equation is widely used by paint manufactures to provide an estimate of underwater areas of vessels for paint application (Schiff et al., 2004). Vessel length was estimated based on a dataset from a boat survey. The survey was conducted by researchers from San Francisco State on vessel sizes and types in California's marinas during 2007-2009 (Godard and Browning, 2011). Table 3 shows their survey results on vessel lengths. The percentages of vessels in each length category are similar for the survey conducted in 2007-2008 and 2009. The percentage numbers from 2009 survey were used to derive number of vessels of certain length category for each scenario (Table 4).

To estimate vessel beam size, a set of survey data obtained from the Shelter Island Yacht Basin (SIYB) was used. The data contain beam width and vessel length for marinas in the SIYB (2012 Shelter Island Yacht Basin TMDL monitoring and progress report, March, 2013; Appendix Table B-3). Using this dataset, the following relationship between beam width and length were derived:

- Vessel length < 16 ft: Beam width = 5
- Vessel length > 16 ft: Beam width =  $-21.1 + 9.2 \ln(\text{length})$  Equation (4)

The regression in Equation (4) was significant with P-value < 0.0001 and R<sup>2</sup> value of 0.70. This equation is similar to the California Department of Boating and Waterways guidelines (2005), where beam width is estimated as:

$$\begin{aligned} \text{Beam width} &= -14 + 8 * \text{Ln}(\text{Length}) \text{ for power boats and} \\ \text{Beam width} &= -10.5 + 6.5 * \text{Ln}(\text{Length}) \text{ for sail boats} \end{aligned}$$

Using the above method, vessel underwater areas were estimated for each vessel length categories as shown in Table 5.

Table 3: Vessel length in California’s marinas\*

Length of vessel	Count 07-08	Percent 07-08 (%)	Count 09	Percent 2009 (%)
< 16 ft	228	8.7	283	9.4
16-19 ft	450	17.1	595	19.8
20-25 ft	846	32.2	919	30.6
26-39 ft	792	30.1	870	29.0
40-65 ft	295	11.2	315	10.5
> 65 ft	17	0.6	18	0.6
Total	2628	100.0	3000	100.0

\* Source: Godard and Browning, 2011

Table 4: Number of vessels within each length category for the 5 scenarios

Length of vessel	Percent from survey (%)	Scenario 1	Scenario 2	Scenario 3	Scenario 4	Scenario 5
8- 16 ft	9.4	69	120	173	213	448
16-19 ft	19.8	145	252	364	449	943
19-25 ft	30.6	225	389	562	693	1456
25-39 ft	29.0	213	368	532	656	1379
39-65 ft	10.5	77	133	192	238	499
65-160 ft	0.6	4	8	11	14	29
total	100.0	733	1270	1833	2263	4754

Table 5: Estimated beam width and underwater areas for each vessel length category

Length of vessel (ft)	Average length (ft)	Estimated beam (ft)	Underwater area (ft <sup>2</sup> )	Underwater area (m <sup>2</sup> )
8- 16	12	5.0	51.0	4.7
16-19	17.5	5.2	77.8	7.2
19-25	22.5	7.5	144.3	13.4
25-39	32.5	10.9	301.9	28.0
39-65	52.5	15.3	684.5	63.6
65-160	115	22.6	2204.6	204.8

During the model runs, all vessels were assumed to be berthed in the marina rather than moving in or out of the marina. This is because the amount of time a vessel is moving in a marina is minor compared to it being berthed according to the survey by Godard and Browning (2011).

### Effects of underwater hull cleaning

Studies have shown that underwater hull cleaning increases copper release from AFPs both during and after cleaning (Schiff *et al.*, 2004; Earley *et al.*, 2013); therefore, the allowable leach rate is adjusted to account for additional copper loading over no cleaning. Since the MAM-PEC model has no input parameter for hull cleaning, an adjustment factor was calculated for loading from the BMP and non-BMP cleaning and applied to the leach rates calculated from the model.

The adjustment factors were derived from the copper leaching measurement by Earley *et al.*, (2013). Earley *et al.* (2013) measured the life cycle of copper leach rate including before, during and after hull cleaning events using the U.S Navy's Dome measurement method. The study showed that for a 3-year life cycle, copper loading from hull cleaning using the BMP was 41.2 and 44.6% higher for epoxy and ablative AFPs, respectively, over loading from no cleaning; and loading using the non-BMP was 56.2 and 62.3% higher for epoxy and ablative AFPs, respectively, than loading from no cleaning. The adjustment factors were calculated as follows:

$$(100 - ((41.2 + 44.6)/2))/100 = 0.57 \text{ for BMP}$$

$$(100 - ((56.2 + 62.3)/2))/100 = 0.41 \text{ for non-BMP}$$

These factors were then applied to adjust the no-cleaning leach rates calculated from the MAM-PEC model. For example, if the leach rate from modeling was 10 µg/cm<sup>2</sup>/day, the final values of 5.7 and 4.1 µg/cm<sup>2</sup>/day would be produced to account for the effects of hull cleaning using BMP and non-BMP methods, respectively.

In addition, adjustment factors were calculated for a reduced cleaning frequency with BMP and non-BMP methods. The cleaning schedule used by Earley *et al.* (2013) was once every three weeks in the summer (June, July, August) and once every four weeks in September through May, which is consistent with the current regime. In this analysis, a cleaning schedule with a lower frequency (monthly) was used. Using the leach rate data in Earley *et al.* (2013), we calculated the loading from hull cleaning. For a 3-year-lifecycle, an average of 29 and 55.2% of the dissolved copper were from monthly hull cleaning via BMP and non-BMP method, respectively. Consequently, the adjustment factors of 0.71 and 0.448 were used to account for the effects of monthly cleaning.

## **Results and Discussion**

Table 6 shows the leach rates from the modeling ( $LR_0$ ) and the adjusted leach rate to account for the effects of underwater hull cleaning using BMP ( $LR_1, LR_3$ ) and non-BMP ( $LR_2, LR_4$ ) methods. The rates from modeling with no cleaning ranged from  $1.12 \mu\text{g}/\text{cm}^2/\text{day}$  for scenario 5 to  $24.6 \mu\text{g}/\text{cm}^2/\text{day}$  for scenario 1. The adjusted leach rates for BMP cleaning ranged from  $0.64 \mu\text{g}/\text{cm}^2/\text{day}$  for scenario 5 to  $14.02 \mu\text{g}/\text{cm}^2/\text{day}$  for scenario 1. The adjusted leach rates for non-BMP cleaning ranged from  $0.46 \mu\text{g}/\text{cm}^2/\text{day}$  for scenario 5 to  $10.09 \mu\text{g}/\text{cm}^2/\text{day}$  for scenario 1. With less frequent cleaning (monthly), the adjusted leach rates for BMP ( $LR_3$ ) and non-BMP ( $LR_4$ ) ranged from 0.79 to 17.47 and 0.50 to  $11.02 \mu\text{g}/\text{cm}^2/\text{day}$ , respectively. Note that when the cleaning frequency was decreased to monthly, leach rates were increased by 25% for BMP scenarios and 9% for the non-BMP scenarios.

.Table 6: Leach rates from modeling ( $LR_0$ ) adjusted leach rates accounting for cleaning effects ( $LR_1$ : current cleaning schedule using BMP method;  $LR_2$ : current cleaning schedule using non-BMP method;  $LR_3$ : monthly cleaning using BMP method;  $LR_4$ : monthly cleaning using non-BMP method)

Scenario	$LR_0$ ( $\mu\text{g}/\text{cm}^2/\text{day}$ )	$LR_1$ ( $\mu\text{g}/\text{cm}^2/\text{day}$ )	$LR_2$ ( $\mu\text{g}/\text{cm}^2/\text{day}$ )	$LR_3$ ( $\mu\text{g}/\text{cm}^2/\text{day}$ )	$LR_4$ ( $\mu\text{g}/\text{cm}^2/\text{day}$ )
1	24.60	14.02	10.09	17.47	11.02
2	13.35	7.61	5.47	9.48	5.98
3	8.60	4.90	3.53	6.11	3.85
4	2.90	1.65	1.19	2.06	1.30
5	1.12	0.64	0.46	0.79	0.50

In addition to BMP and less frequent cleaning, conversion to non-copper alternatives can also reduce DCu loading in marinas. This reduction can be modeled by MAM-PEC by adjusting the input parameter of application factor. The current analysis assumes that all the vessels in the marina were coated with copper (application factor = 100%). The application factor can be lowered if vessels convert to non-copper products. A 10% conversion would result in about 10% reduction in PEC of DCu since the emission component of the MAM-PEC is linear.

This suggests that conversion to non-copper alternatives can provide additional levels of mitigation and it affects the final selection of maximum allowable leach rates. For example, if the maximum allowable leach rate was set to  $9.48 \mu\text{g}/\text{cm}^2/\text{day}$  ( $LR_3$  for scenario 2), marinas represented in scenario 2 would meet the target CTR of  $3.1 \mu\text{g}/\text{L}$  with monthly cleaning using BMP. Marinas with higher copper exposure levels, such as those in scenario 3, may not meet the target CTR. However, if 12% of vessels in scenario 3 marinas convert to non-copper alternatives, they will be able to meet the target CTR.

A dataset containing copper leach rates calculated by the International Organization for Standardization (ISO) method for 169 AFP products was obtained from registrants as a requirement of DPR's copper AFP reevaluation (Appendix II). ISO method is known to over-predict the actual leach rates (i.e., quantified by the Dome method). Therefore, we applied a commonly-used adjustment factor of 2.9 that has been established by Finnie (2006).

The adjusted leach rates (similar to the Dome method leach rates) for current AFPs ranged from 1.0 to  $29.6 \mu\text{g}/\text{cm}^2/\text{day}$ , with a median rate of  $10.1 \mu\text{g}/\text{cm}^2/\text{day}$  (Fig. 2, Appendix II). Table 7 shows the percentage of these AFP products that have the adjusted ISO leach rates above  $LR_0, LR_1, LR_2, LR_3,$  and  $LR_4$ . For scenario 1, about 5, 23, 50, 17, and 41% of products exceeded  $LR_0, LR_1, LR_2, LR_3,$  and  $LR_4$ , respectively. For the most conservative case (scenario 5), 97-100% of

these products exceeded LR<sub>0</sub>, LR<sub>1</sub>, LR<sub>2</sub>, LR<sub>3</sub>, and LR<sub>4</sub>. The products with leach rates higher than the allowable leach rates would be targeted for reformulation if reformulation is used as a mitigation approach. These percentage numbers will change if the leach rate information for existing AFP products changes.

Table 7: Percent of current AFP products with adjusted leach rates exceeding LR<sub>0</sub>, LR<sub>1</sub>, LR<sub>2</sub>, LR<sub>3</sub> and LR<sub>4</sub>

Scenario	Percent of products exceeding LR <sub>0</sub> (%)	Percent of products exceeding LR <sub>1</sub> (%)	Percent of products exceeding LR <sub>2</sub> (%)	Percent of products exceeding LR <sub>3</sub> (%)	Percent of products exceeding LR <sub>4</sub> (%)
1	5	23	50	17	41
2	23	72	85	58	83
3	67	88	91	83	91
4	93	93	97	93	97
5	97	100	100	100	100

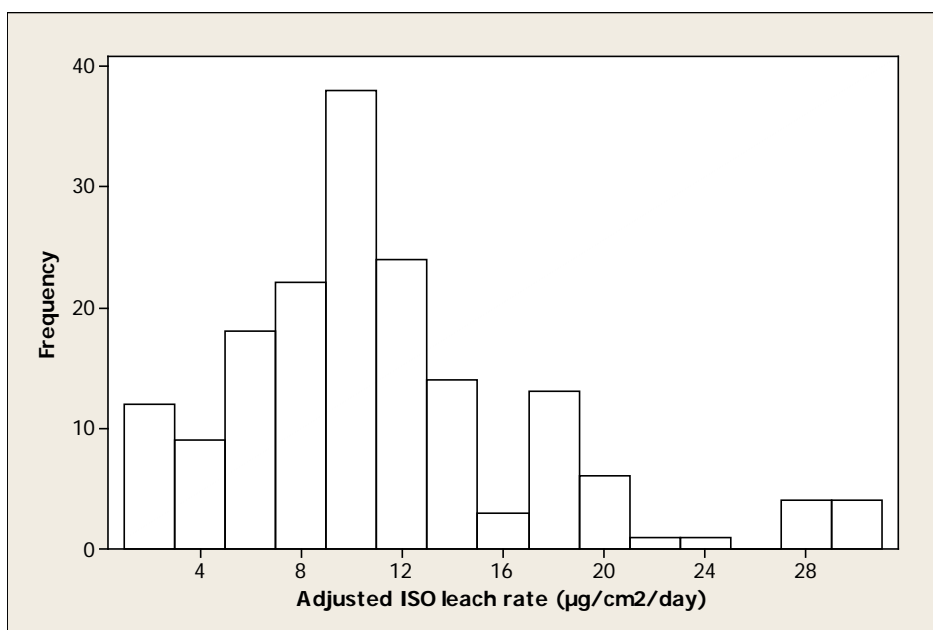


Fig 2. Histogram of adjusted product leach rate

### Uncertainties

The uncertainties of the modeling are mainly from two groups of input variables that the modeling results are heavily dependent on: the physical dimensions of the modeled marina and the copper emission inputs. The important parameters related to physical dimensions include marina width (Y1), length (X2) and outlet width (X3). Marina width and length affect water volume, dilution, exchange and therefore PECs of copper. Outlet width affects tidal exchange rates and therefore the PECs of copper within the marina. MAM-PEC assumes a rectangular/square shape of marina (Fig 3), while in reality, not all marinas are of this shape. This inconsistency introduces uncertainties to the modeling results. However, there is little we can do to reduce this source of uncertainty due to two reasons: (1) this analysis was not based on



any particular marina but a generic case, and (2) in reality, marinas in California vary greatly in shape and there is no particular shape design that can be considered as highly “representative.”




Fig 3: Conceptual model of a marina in MAM-PEC (van Hattum *et al.*, 2002)

In addition to physical dimension inputs, there are uncertainties associated with copper emission inputs including vessel size distribution, number of vessels moving, number of vessels at berth, application factor (percentage of vessels applied with copper paint) and the underwater surface area of vessels. Information regarding vessel sizes in California marinas was based on recent surveys (2009) conducted on California marinas. Thus, the size distribution is likely representative for marinas within the State. However, considering that vessel size distributions do change over time, our analysis will have to be adjusted accordingly if major shifts in vessel size distribution do occur. We also formed the assumption that all vessels are at berth based on this survey’s results, which shows that the time a vessel spent moving is minor compared to the time it spent at berth.

The largest uncertainties are perhaps associated with the estimate of underwater surface areas of vessels. Equation (3) provides a rule-of-thumb estimate. Methods for more accurate estimations are currently not available. Underwater surface area is one of the most important input variables for MAM-PEC. Doubling the values of underwater area would almost double the PECs of dissolved copper. Therefore, a good method for estimating vessel underwater surface area would greatly reduce model uncertainties. Studies are needed to obtain better estimations on the antifouled underwater areas for vessels in California marinas.

## Conclusions

Five scenarios representing various levels of copper loading were defined with scenario 1 having a lower level of copper loading and scenario 5 having the maximum level of copper loading. The leach rates ranged from 1.12 to 24.60  $\mu\text{g}/\text{cm}^2/\text{day}$  without considering the effects of underwater hull cleaning (no cleaning). Factors of 0.57 and 0.41 were applied to adjust the leach rate to account for cleaning with BMP and non-BMP methods, respectively. The adjusted leach rates ranged from 0.64 for scenario 5 with the non-BMP to 14.02  $\mu\text{g}/\text{cm}^2/\text{day}$  for scenario 1 with BMP. The impact of limiting underwater hull cleaning to monthly can result in increasing the adjusted leach rates by 25% for BMP scenarios and 9% for the non-BMP scenarios. A transition from using copper antifouling paint products to non-copper alternatives can further reduce DCu concentrations and consequently affects the selection of maximum allowable leach rates. A comparison of all these maximum allowable leach rate thresholds to the leach rates of currently-registered AFPs shows that 4.7–100% of these products would need to be reformulated depending on the scenario. The findings from this analysis serve as a basis for decision making on the scenario selection and the final leach rate determination.

## References

California Department of Boating and Waterways. 2005. Guidelines for marina berthing facilities. Available online via: <http://www.dbw.ca.gov/PDF/MarinaGuide/Guide05.pdf>

Earley PJ, Swope, BL, Barbeau, K, Bunday, R, McDonald, JA, Rivera-Duarte, IR. 2014. Life cycle contributions of copper from vessel painting and maintenance activities. *Biofouling*. 30(1): 51–68

Finnie AA. 2006. Improved estimates of environmental copper release rates from antifouling products. *Biofouling*. 22(5):279-91

Godard, D and Browning, R. 2011. 2007–2009 California Boater Survey Report. San Francisco State University

International Paint Regulatory Affairs. 2010. Mitigation proposal in compliance with California Department of Pesticide Regulation notice to re-evaluate copper based antifouling paint pesticides. Submitted to DPR as required by product reevaluation.

San Diego Regional Water Quality Control Board. 2005. Total Maximum Daily Load for Dissolved Copper In Shelter Island Yacht Basin, San Diego Bay Resolution. Resolution No. R9-2005-0019 Basin Plan Amendment and Technical Report.

Schiff K, Diehl D, Valkirs A. 2004. Copper emissions from antifouling paint on recreational vessels. *Mar Pollut Bull*. 48:371–377.

Singhasemanon N, Pyatt E, Bacey J (2009) Monitoring for indicators of antifouling paint pollution in California marinas. California Environmental Protection Agency, Department of Pesticide Regulation, Environmental Monitoring Branch, EH08-05. URL: <http://www.cdpr.ca.gov/docs/emon/pubs/ehapreps/eh0805.pdf>.

van Hattum, B.; Baart, A.; Boon, J. (2002). Computer model to generate predicted environmental concentrations (PECs) for antifouling products in the marine environment. IVM and WL | Delft Hydraulics, Netherlands.

van Hattum, B.; Baart, A.; van Gils, J.; Elzinga, E. (2011). User manual – quick guide. MAMPEC 3.0 MAMPEC-BW 3.0. IVM and WL | Delft Hydraulics, Netherlands. May 2011.

## Appendix I

### Measured physicochemical data for 20 California marinas

Marina	Location	Total Vessels	Tidal Period (hr)	Mean Tidal Range (m)	Water Depth (m)	Surface Area (m <sup>2</sup> )	Length X2 (m)	Width Y1 (m)	Outlet Width (m)	Median TSS (mg/L)	Median DOC (mg/L)	Background DCU (µg/L)	pH	Salinity (g/kg)	Temp °C
San Francisco Marina East	San Francisco Bay	313	12.41	1.25	2.44	55696	236	236	43	21.9	0.9	0.4	7.52	38.85	16.6
San Francisco Marina West	San Francisco Bay	388	12.41	1.25	2.44	116550	185	630	130	21.9	0.9	0.4	7.52	38.85	16.6
Coyote Point Marina	San Francisco Bay West	565	12.41	1.95	3.66	105876	204	519	56	17.8	1.7	1.3	7.77	33.12	21
South Beach Harbor	San Francisco Bay West	700	12.41	1.25	9.98	100320	285	352	74	16.2	0.9	0.7	7.31	33.88	18.1
Marina Bay Yacht Harbor	San Francisco Bay East	850	12.41	1.32	7.16	446572	778	574	233	13	1.1	1.7	7.54	32.94	19.5
Ballena Isle Marina	San Francisco Bay East	504	12.41	1.48	2.74	82140	222	370	250	20.1	1.4	1.4	7.96	32.33	20.3
Berkeley Marina	San Francisco Bay East	1,052	12.41	1.32	3.66	228762	537	426	89	18.1	1	0.7	7.84	32.42	18.6
Santa Cruz Harbor	Santa Cruz Harbor	1,000	12.41	1.08	3.74	199810	130	1537	74	23.2	1	0.3	8.04	41.89	16.5
Monterey Harbor	Monterey Bay	413	12.41	1.08	3.62	98568	296	333	204	14.1	1	0.2	8	42.01	16.4
Santa Barbara Harbor	Santa Barbara Channel	1,133	12.41	1.11	6.14	230436	444	519	193	18.2	0.8	0.1	7.84	37.49	18.2

Loch Lomond Marina	San Francisco Bay North	517	12.41	1.32	2.44	128316	204	629	50	18.9	1.3	1.7	7.41	29.17	21.7
Long Beach Downtown Shoreline Marina	Long Beach	1,800	12.41	1.16	2.03	349821	827	423	100	18.5	1	0.7	7.79	49.42	21.6
Marina del Rey, Santa Monica	Santa Monica Bay	4,754	12.41	1.15	5.5	1631000	1277	1277	305	17.1	1.1	1	7.75	33.76	22.9
Fisherman's Wharf Marina	San Francisco Bay	300	12.41	1.25	2.73	65860	178	370	50	NA	NA	NA	NA	NA	15.6
San Leandro Marina	San Francisco Bay East	465	12.41	1.48	2.13	71750	287	250	65	NA	NA	NA	NA	NA	21.1
Redondo Beach Marina	Santa Monica Bay	765	12.41	1.15	5.50	115200	480	240	40	NA	NA	NA	NA	NA	17.8
San Pedro Marina	Long Beach	1,681	12.41	1.16	2.03	557500	500	1115	192	NA	NA	NA	NA	NA	19.4
Shelter Island Yacht Basin	San Diego Bay	2,132	12.41	1.23	6.00	934400	584	1600	200	NA	NA	0.5	NA	NA	22
Downtown Marina, San Diego	San Diego Bay	410	12.41	1.23	6.00	98645	545	181	74	NA	NA	NA	NA	NA	22
Harbor Island Marina	San Diego Bay	1,744	12.41	1.23	6.00	495423	311	1593	244	NA	NA	NA	NA	NA	22

## Appendix II

### Copper leach rates for currently registered AFP products

Product #	ISO Leach Rate	Adjusted Leach Rate
	85.7	29.6
	85.7	29.6
	85.7	29.6
	85.7	29.6
	82.4	28.4
	82.4	28.4
	82.4	28.4
	82.4	28.4
	67.4	23.2
	61.2	21.1
	60.7	20.9
	60.7	20.9
	60.7	20.9
	60.7	20.9
	58.9	20.3
	58.9	20.3
	55.0	19.0
	55.0	19.0
	55.0	19.0
	55.0	19.0
	55.0	19.0
	55.0	19.0
	55.0	19.0
	55.0	19.0
	55.0	19.0
	55.0	19.0

26	55.0	19.0
27	54.1	18.6
28	51.9	17.9
29	51.4	17.7
30	46.4	16.0
31	46.4	16.0
32	45.4	15.7
33	42.4	14.6
34	41.2	14.2
35	41.2	14.2
36	41.0	14.1
37	41.0	14.1
38	40.9	14.1
39	40.9	14.1
40	38.3	13.2
41	38.3	13.2
42	38.3	13.2
43	38.3	13.2
44	38.3	13.2
45	38.3	13.2
46	38.3	13.2
47	35.9	12.4
48	35.8	12.3
49	35.5	12.2
50	34.6	11.9
51	33.8	11.7
52	33.4	11.5
53	33.3	11.5
54	33.2	11.5
55	33.2	11.5

56	32.9	11.3
57	32.9	11.3
58	32.9	11.3
59	32.9	11.3
60	32.9	11.3
61	32.5	11.2
62	32.5	11.2
63	32.5	11.2
64	32.5	11.2
65	32.5	11.2
66	32.5	11.2
67	32.5	11.2
68	32.5	11.2
69	32.1	11.1
70	32.0	11.0
71	30.5	10.5
72	30.5	10.5
73	30.5	10.5
74	30.5	10.5
75	30.5	10.5
76	30.5	10.5
77	30.4	10.5
78	30.3	10.4
79	30.1	10.4
80	30.1	10.4
81	30.1	10.4
82	29.7	10.2
83	29.7	10.2
84	29.4	10.1
85	29.4	10.1

86	29.2	10.1
87	28.6	9.9
88	28.5	9.8
89	28.5	9.8
90	28.5	9.8
91	28.5	9.8
92	28.5	9.8
93	27.7	9.6
94	27.6	9.5
95	27.5	9.5
96	27.5	9.5
97	27.5	9.5
98	27.5	9.5
99	27.2	9.4
100	27.0	9.3
101	26.8	9.2
102	26.5	9.1
103	26.5	9.1
104	26.5	9.1
105	26.5	9.1
106	26.5	9.1
107	26.5	9.1
108	26.5	9.1
109	25.7	8.9
110	25.7	8.9
111	25.7	8.9
112	25.7	8.9
113	25.7	8.9
114	24.9	8.6
115	24.5	8.4



116	24.5	8.4
117	24.5	8.4
118	24.5	8.4
119	24.5	8.4
120	23.8	8.2
121	22.7	7.8
122	21.5	7.4
123	21.5	7.4
124	21.5	7.4
125	21.5	7.4
126	21.5	7.4
127	21.5	7.4
128	21.3	7.3
129	21.0	7.2
130	20.5	7.1
131	19.7	6.8
132	19.7	6.8
133	18.8	6.5
134	18.8	6.5
135	18.1	6.2
136	18.1	6.2
137	18.1	6.2
138	18.1	6.2
139	18.1	6.2
140	18.0	6.2
141	17.4	6.0
142	16.6	5.7
143	16.6	5.7
144	16.2	5.6
145	15.3	5.3

146	15.1	5.2
147	15.0	5.2
148	15.0	5.2
149	11.9	4.1
150	11.9	4.1
151	11.8	4.1
152	11.8	4.1
153	11.4	3.9
154	11.4	3.9
155	9.5	3.3
156	9.0	3.1
157	9.0	3.1
158	8.3	2.9
159	4.7	1.6
160	4.7	1.6
161	4.7	1.6
162	4.7	1.6
163	4.7	1.6
164	4.7	1.6
165	2.9	1.0
166	2.9	1.0
167	2.9	1.0
168	2.9	1.0
169	2.9	1.0